



Two Spindle Copy Router KF 228


Multifunctional use for uPVC and aluminium profiles

KF228

Flexible Copy Router for different materials

DESCRIPTION:


- Two-step copy pin for various sizes of copy routing)
- Variable controlled processing depth
- Vertical and Horizontal processing
- revolver stop for the setting of three routing depths
- High speed copy pin milling head
- One fixture can process two sides of profiles
- One blank template standard

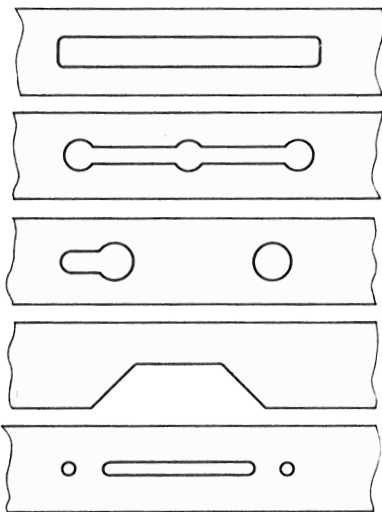


TECHNICAL DATA:

Voltage:	230/400V, 50/60Hz
Power:	2 x 1,1kW
Speed:	2800rpm
Routing depth:	110mm
Speed milling spindle:	12000rpm
max. stroke (vertical)	300x100mm
max. stroke (hor.)	290x80mm
Air connection:	6-8bar
Weight:	205kg

DETAILS:

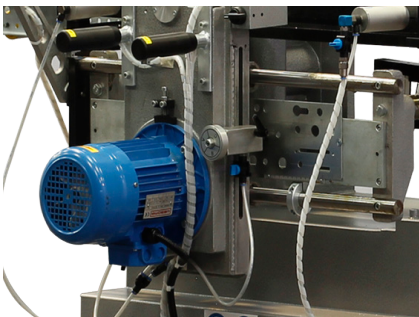

Front copying unit

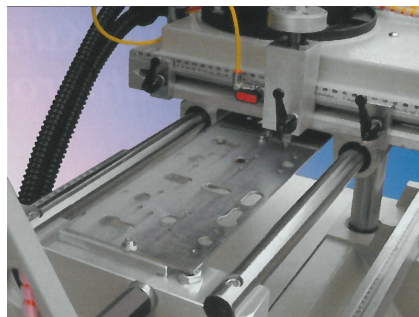

top copying unit

ORDER NUMBERS:

21090001 Two spindle copy router KF228

Optionen

21081682 Routing motor 2 speeds

95080671 Cooling spray unit

95015491 High Quality Lubricant 5.0l, proportion of mixture 1:19